

Fume Filtration


Lincat's fume filtration units are the ideal companion to Lynx 400 and Silverlink 600 electric appliances. The three part filter system comprises a washable aluminium mesh for removing large grease particles; a washable foam layer which absorbs fine grease particles; and a replaceable activated charcoal filter. These essential kitchen items reduce grease deposits and remove cooking odours to create a clean and fresh working environment.




L4

Features

- Powerful centrifugal fans draw cooking fumes through a three part filtration system
- Cleansed air is expelled at top rear of unit
- Hinged top panel gives easy access for cleaning and filter maintenance
- Overheat protection system cuts power to fans in the event of a cooking appliance fire
- Suitable for use above electric appliances with a maximum depth of 600mm (Note: Not suitable for use with gas appliances.)



Aluminium mesh filter



Integral lighting



L4



L3

Technical Specifications

- Volumetric flow rate per fan: 230 m³ per hour
- Volume of air filtered per hour:
 - 460 m³ (L3)*
 - 690 m³ (L4)*
- Recommended mounting height above appliance: 800mm

Product Code	Description	Height (mm)	Width (mm)	Depth (mm)	Power (kW)	Net Weight (kg)
L3	Fume Filtration Unit	545	915	610	0.35	26
L4	Fume Filtration Unit	545	1295	610	0.45	35

* Volume of air filtered through a new unit. This will decrease as the filters are used.



You can choose Lincat products with confidence. All products in this leaflet are backed by the reassurance of a comprehensive UK twelve months parts and labour warranty.

QUALITY GUARANTEED



**Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom**

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk

Fume Filtration Units

Key Features

- Type: Electric
- Air re-circulation
- Three part filtration system
- Illumination
- Overheat/fire protection
- L3 suitable for use over electric units up to 9kW
- L4 suitable for use over electric units up to 14kW



L3

Construction

- Body: stainless steel grade 430
- Filters: Aluminium mesh and carbon

Available Options


- Choice of widths

Available Accessories

- N/A

Specifications

Model	L3	L4
External height (mm)	545	545
External width (mm)	915	1295
External depth (mm)	610	610
Net weight unpacked (kg)	25	44
Volume of air filtered per hour (m ³)	460	690
Gross weight packed (kg)	31	50
Shipping volume (m ³)	0.497	0.657
Total electrical power rating (kW)	0.35	0.45
Electrical supply 1N~+E 230V 50-60Hz Current Rating (A)	1.5	2.0

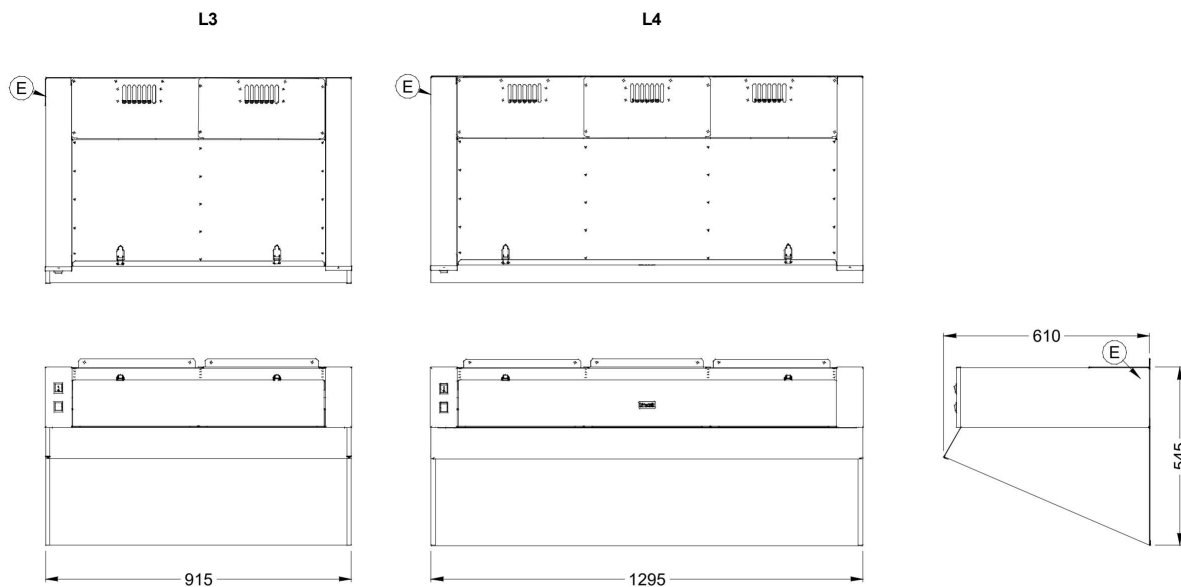

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
FUME FILTRATION
Issue date: Oct-09